

The All New – All Weather – MaxxFan™

When Opened

The MaxxFan's unique patent pending rain shield automatically moves into position, protecting your vehicles interior.

When Closed

The rain shield tucks away under the vent lid leaving a low profile, euro-style appearance.

From MaxxAir Vent Corporation



MaxxFan™ - White Lid
P/N 00-051000 - \$279.95
Manufacturers Suggested Retail Price

MaxxFan™ - Smoke Tint Lid
P/N 00-052000 - \$299.95
Manufacturers Suggested Retail Price

- MaxxFan, a new, one-of-a kind ventilator system that PROTECTS your RV interior - always - in any weather - rain or shine
- Brings in fresh cool air and removes hot musty air and odors
- A complete all in one system that fits standard 14" x 14" inch RV roof openings
- Opens and closes like most standard roof vents using a manual knob located at the ceiling
- Includes a powerful 3-speed fan, thermostat, air intake and exhaust functions
- Easy to remove interior insect screen, simply rotate four retaining knobs to remove for cleaning, No tools required
- Top Vent Lid available in Translucent White or Smoke Tint
- Features a powerful, fuse protected, sealed ball bearing, 12 volt fan motor and a 12 inch, 10 bladed fan
- Provides over 900 CFM of airflow on High using 4.4 amps, 730 CFM at 2.5 amps and 500 CFM on Low at 1.4 amps
- Limited 2 year warranty
- All mounting screws and hardware included. (Roof sealant must be purchased separately)



Visit our website at www.maxxair.com

MaxxAir Vent Corp • 5513 W. Sligh Ave • Tampa, FL 33634 • Phone (800) 780-9893 • (813) 882-8282 • Fax (813) 876-2550

MaxxFan™ Installation Instructions



1 To install the MaxxFan™ simply fasten the roof receiving flange to any standard 14 inch x 14 inch RV roof opening using standard screws and roof sealant. Note the MaxxFan™ laying along side the roof vent ready to receive the 12 volt wire hook up at the roof vent opening.


2 Connect the RV's 12 volt power and lower the MaxxFan™ assembly on to the roof receiving flange.

3 The MaxxFan™ securely fastens to the roof flange using four stainless steel screws that are provided. Installing the interior trim ring at the ceiling completes the installation. Complete detailed instructions are included inside each MaxxFan™ package and are available at the MaxxAir Vent Corp. website.



Interior of MaxxFan™

Overall Dimensions

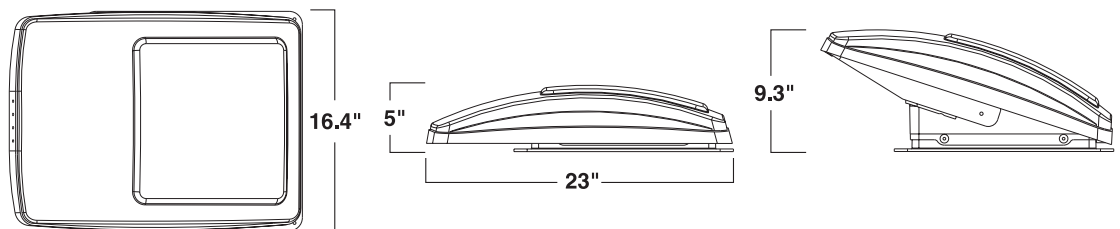

Visit our website at www.maxxair.com

MaxxAir Vent Corp • 5513 W. Sligh Ave • Tampa, FL 33634 • Phone (800) 780-9893 • (813) 882-8282 • Fax (813) 876-2550